

# WINATEQ

Multistation  
supervision software



PARAMETERS	
TYPE	LEAK TEST
COUPLING A	00.0 s
FILL	01.0 s
STABILISATION	01.5 s
TEST	02.0 s
DUMP	00.5 s
PRESSURE UNIT	bar
Max. FILL	3.00 bar
Min. FILL	1.00 bar
REJECT UNIT	Pa
Test FAIL	0060 Pa
Reference FAIL	0000 Pa


## 5 SERIES

- ✓ EASY SET-UP
- ✓ MULTISTATION CAPABILITY
- ✓ INTEGRABLE SOFTWARE COMPATIBLE WITH OUR WINDOWS CUSTOMIZED APPLICATIONS



### Main features

- Easy to install including system configuration back up
- Can be used as a base to develop customized application
- Presentation and back up of the test results (Import and export function for spread sheet application)
- Presentation and storage of the test measurement curves
- Different access levels (operator / supervisor)

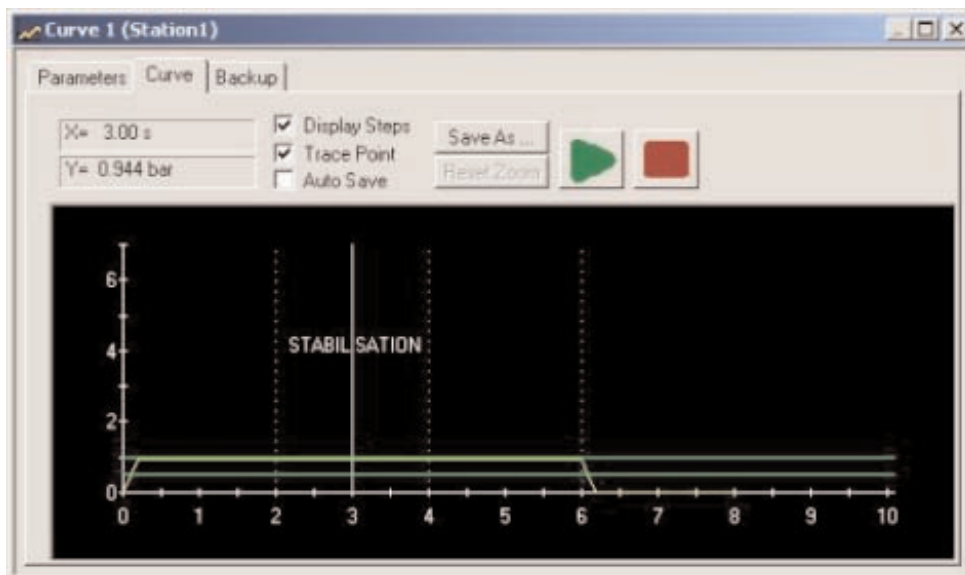

B-WINATEQB-U

ATEQ PL Sp. z o.o.  
ul. Patriotów 181, 04-881 WARSZAWA  
tel. (22) 612 26 78, fax (22) 612 26 99  
e-mail: info@ateq.pl, http://www.ateq.pl

**ATEQ**  
www.ateq.pl



CE