

We test, You produce.

Ioniq 20

LEAK TESTER FOR HIGH VOLUME PRODUCTION

On the basis of its wellproven concept of production line QC Testers, ATEQ has now developed a new leak Tester, designed for the specific requirements of high volume production of plastic parts.

This instrument is used for the detection of localised moulding faults, insufficient membrane thickness, perforations, etc.... The IONIQU is based on discharge current measurement and is able to detect defects in the region of 10µm.

Highlights

- 1 to 3 SIMULTANEOUS TEST CHANNELS
- DISPLAY 1 to 3 CHANNELS
- FOR INDUSTRIAL LINE AND LABORATORY



Ioniq 20

LEAK TESTER FOR HIGH VOLUME PRODUCTION

Measurement principle

- The IONIQ measures the current flowing between a patented charged probe and a ground plate placed under the part to be tested.
- The IONIQ uses the % of the nominal voltage (which reflects the discharge current), measured on the part as PASS/FAIL level.
- In a PASS situation (fig 1): No hole, no weak part, the IONIQ measures a high %. The measured voltage and the nominal voltage are virtually equal. The result is above the reject level, the part has passed the test.
- In a FAIL situation (fig 2): The IONIQ measures a low %. The measured voltage is significantly below the nominal voltage. The result is below the reject level, the part has failed the test.
- Test limitations: short probe-part-plate distance, electrical insulation from environment.

Applications



- This system is ideal for your high volume tests on bottle caps for injection point defects, on plastic or insulating membranes for thickness defects.

Main features

- Integrated ionising high voltage generator (5 to 27.3 kV)
- Reject levels as % of nominal voltage (0 to 100%)
- Monitoring and protection of high voltage generator
- Limitation of the current rating
- Speed: Minimum cycle time 0.6s
- I/O's for instrument control and results
- 32 programs
- Remote control allows the test module to be closed to the test part
- And: Language selection, customization of test ...

Technique features

High voltage generator	Integrated and adjustable according to application (5 to 27.3 kV)
Temperature	Operating: + 10°C à + 45°C Storage: 0°C à + 60°C
Dimensions	Box dimensions: dimensions : H x L x P = 136 x 250 x 255 mm Weight: 8 kg Remote control: dimensions: H x L x P = 250 x 250 x 60 mm Weight: 2.8 kg
Power supply	24 VDC/ 1A Note: It is vital that the instrument is connected to a good quality earth.

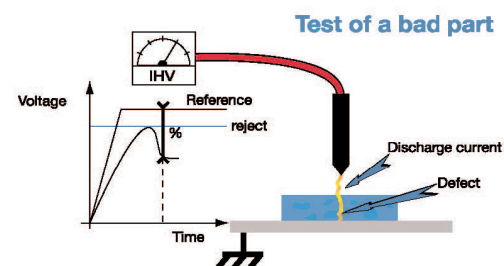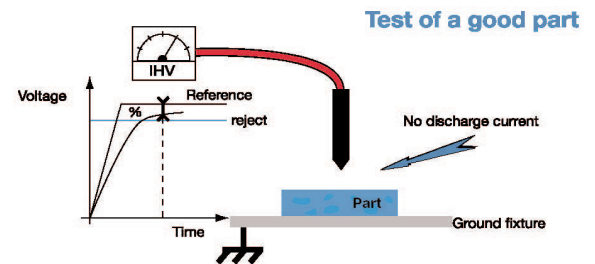

Interfaces	Programming via remote control 7 inputs / 5 outputs for PLC controlled applications. Inputs: Optically isolated. 24 V - 10 mA maximum or dry contact. Outputs: Relay output Rated 48 V / 200 mA maximum.
Optional	Save results module Standard resistor box with 2 values

